


DIGITAL DISPLAY FIRST INSTRUCTIONS

Thank you for choosing a Digital Signage device. To ensure the best performance of your device, we have conducted thorough quality checks before shipping the display to you. The digital has been restored to default settings and has been verified to be in proper working condition.

Get started



Plug into socket.
Device will automatically turn itself on.




The following basic settings have been made:

- Language: English
- Date, Time: GMT+1
- Screen orientation: Vertical
- Picture mode: Shops & Shopping centres
- Temperature setting: 77°C

Use the remote control to turn the device on/off and to change settings.



Play your content

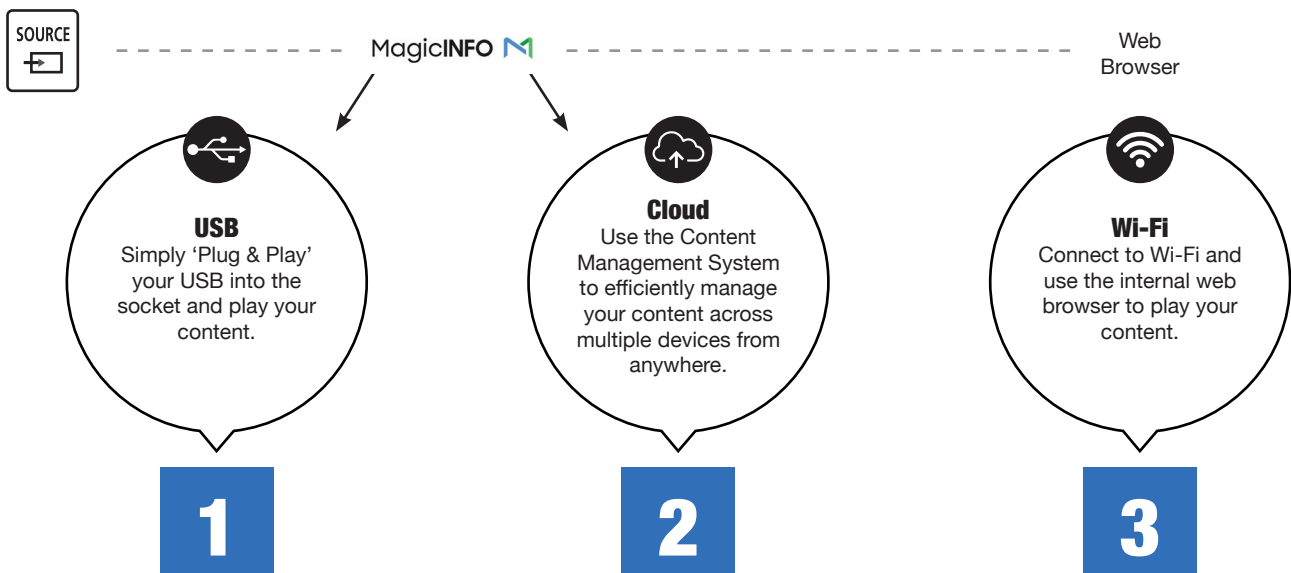Start playing your own content! You can choose various ways to display. Follow the instructions below.



1 USB


Plug in your USB drive

HOME  -> Player -> RETURN 

Select between internal or external memory (your USB drive name appear)

Viewing content

1. Select either internal or external memory. The files, saved in the selected memory, appear.
2. Select the desired file. The content appears on the screen.
3. Select a content type as criterion to search for a desired content list.
4. Set different options for Player.

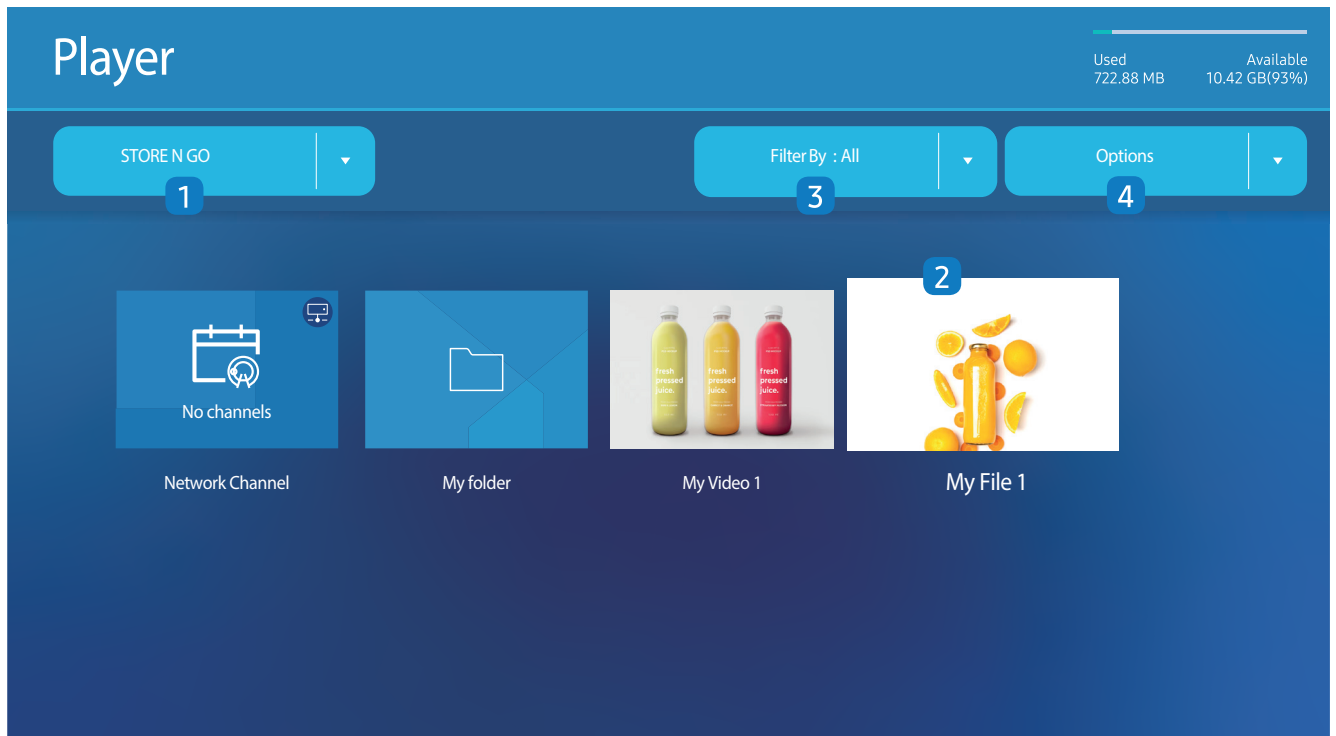

File Formats Compatible with Player

- Supported file systems include FAT32 and NTFS.
- A file with a vertical and horizontal resolution larger than the maximum resolution cannot be played. Check the vertical and horizontal resolution of the file.
- Check the supported video and audio Codec types and Versions.
- Check the supported file versions.

PowerPoint version up to 97 – 2013 is supported

For USB-Internal Memory file transfer, click Options -> Send

Location of template files

- Internal Memory -> USB transfer: USB under MagicinfoSlide folder
- USB -> Internal Memory transfer: Internal Memory -> under My Templates folder

Location of other files (non-template)

- Internal Memory -> USB transfer: USB -> under MagicinfoSlide folder
- USB -> Internal Memory transfer: Under the root folder


2 Content management system

With Samsung VXT, managing your content has never been easier. You can play and adjust your content remotely, from anywhere in the world.

Curious about the Samsung VXT CMS? Enjoy a free trial and experience its simplicity firsthand. With a virtual screen, you can explore the VXT solution right on your PC, with no need to connect to a physical display.

When you're ready to deploy, simply purchase and activate your license online at vxt.samsung.com, where you'll also find detailed information and tutorials to make content management a breeze.


Samsung VXT CMS on your digital display

HOME  -> Features -> Apps -> Download VXT Player -> Open

Connecting license to your digital displays

1. Access the Samsung VXT dashboard and click the '+' icon next to 'Screen'
2. A license code will be provided, which you'll need to enter in the VXT Player on your digital display.
You're all set to start creating and controlling your content!

Dashboard of Samsung VXT CMS

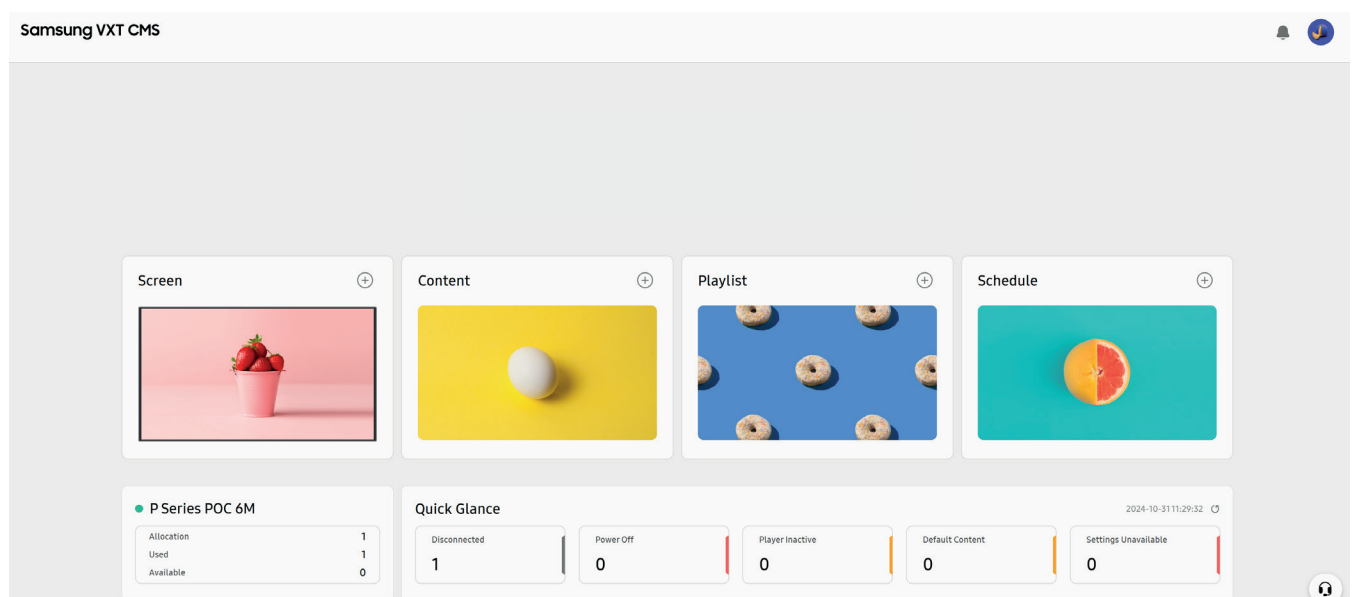

Samsung VXT CMS

Screen Content Playlist Schedule

P Series POC 6M

Allocation	1
Used	1
Available	0

Quick Glance



Disconnected	Power Off	Player Inactive	Default Content	Settings Unavailable
1	0	0	0	0

2024-10-31 11:29:32




3

Web Browser

Connect the network to access the Internet from the product like accessing the Internet from a computer.

SOURCE  -> Web Browser -> ENTER 

Settings

SOURCE  -> Web Browser ->  -> Settings -> ENTER 

Refresh Interval

Set the time for the web browser to wait before returning to the home page.

- Off / 5 min / 10 min / 15 min / 30 min

Zoom

Set the zoom scale to apply when the web browser is refreshed.

- 50% / 75% / 100% / 125% / 150% / 200% / 300%

Home Page

Set the website to display when the web browser is refreshed.

- Samsung Display / Custom

Custom

Enter the URL to set as the home page.

- Enter URL

Available only when Home Page is set to Custom.

